




Toshiba Portege M300 Keyboard Replacement

This will demonstrate how to install a Toshiba Portege M300 keyboard.

Written By: Alison Wendt

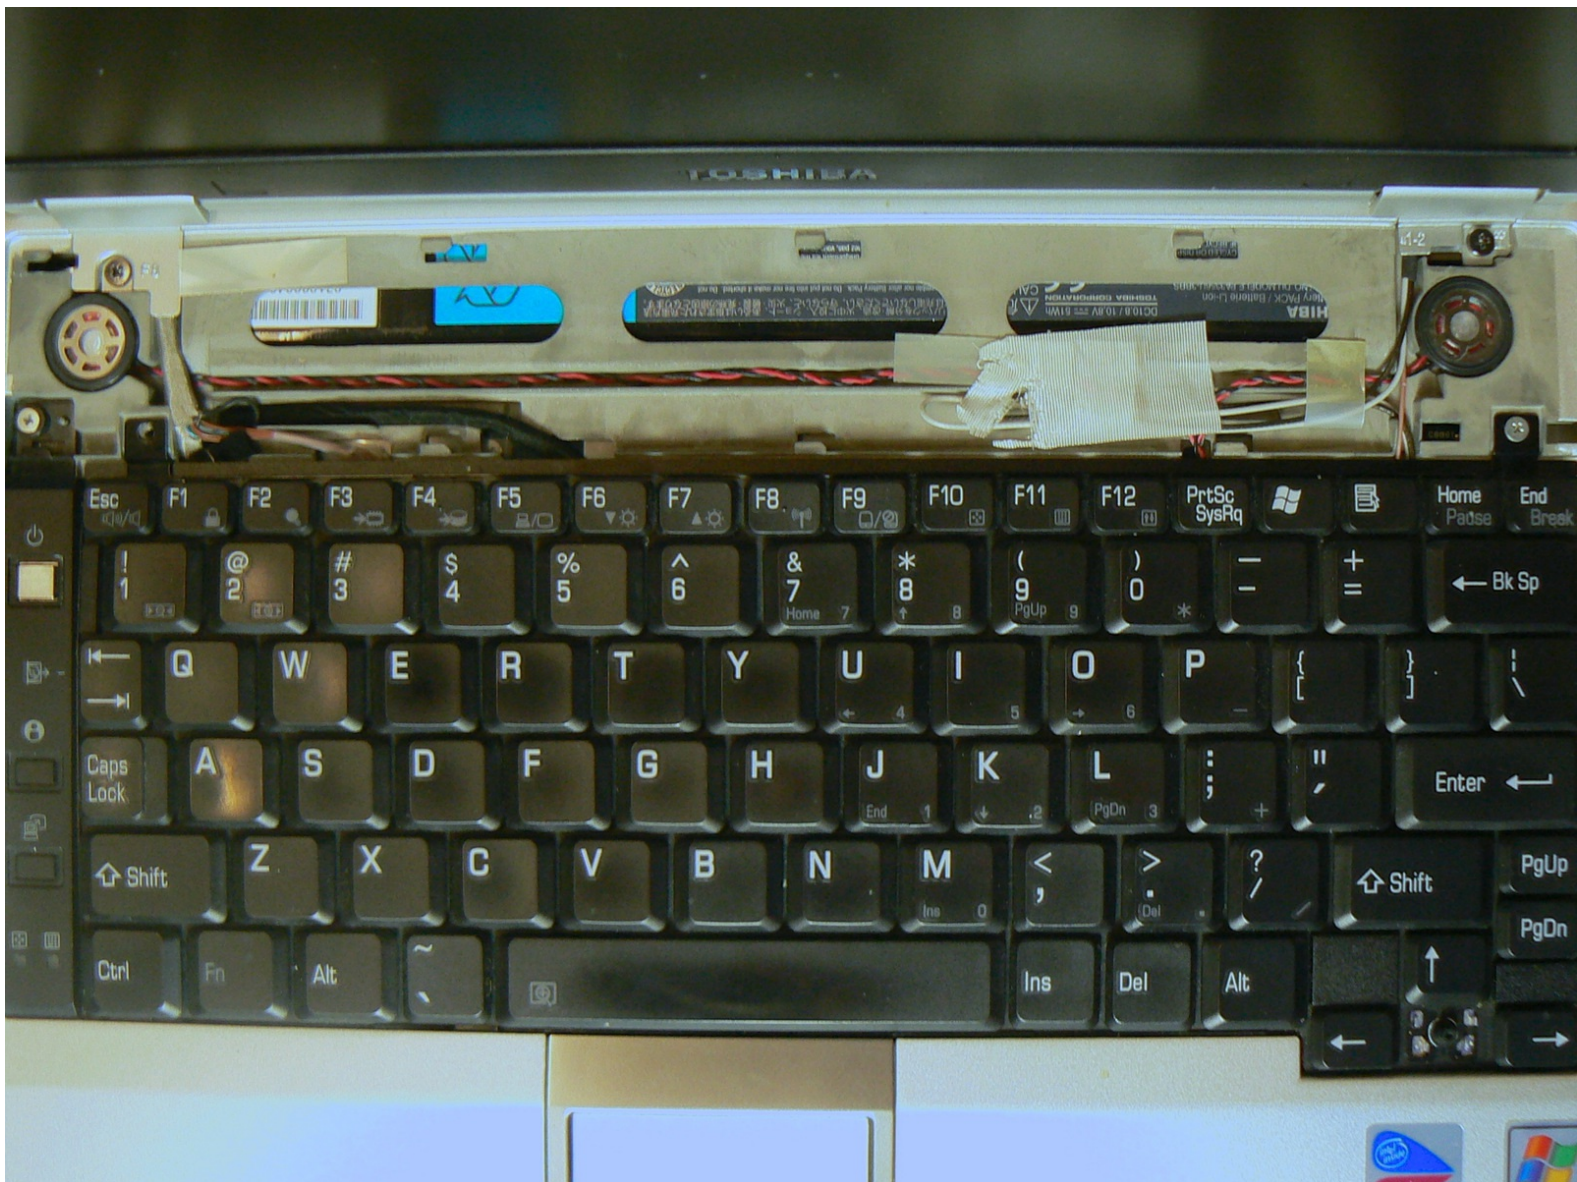

INTRODUCTION

This guide will go through the steps needed to install a new keyboard.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Turn the computer over onto its back.

Step 2




- Slide the lock on the left side to the unlock position.
- Slide the lock on the right side to the unlock position until there is a clicking sound.

Step 3



- Remove the battery by sliding it out while both locks remain in the unlock position.

Step 4 — Keyboard

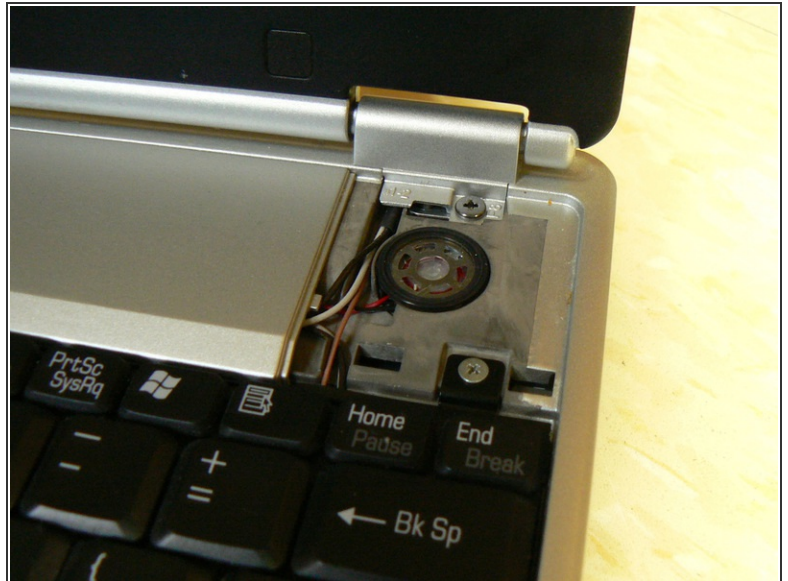


- Use a plastic opening tool to unsnap the right hand side speaker cover.

Step 5




- Remove the rest of the cover by sliding it to the right and lifting the edge.

Step 6

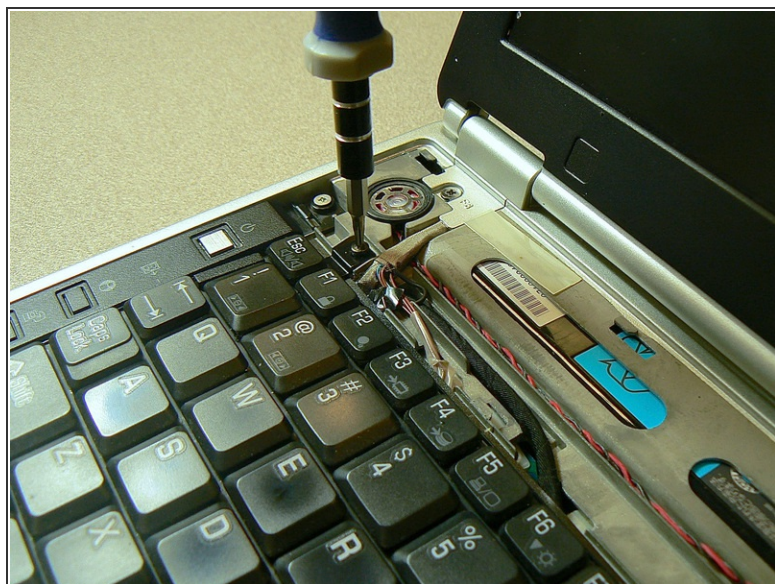


- Use a Phillips head #00 screwdriver to remove the two silver screws at the top of the keyboard.
- Two 4.0 mm coarse thread screws.

Step 7

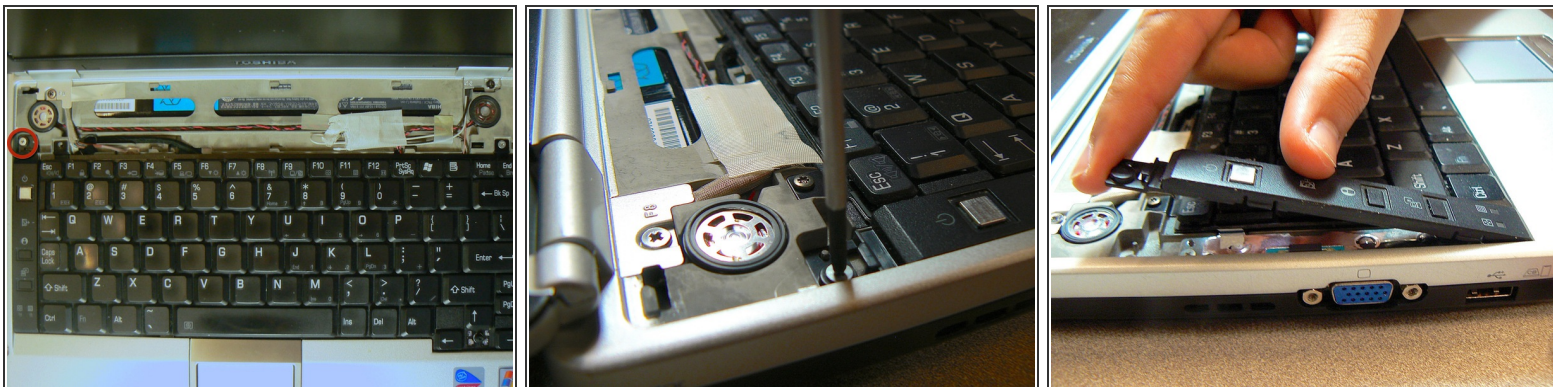


- Remove the Torx screw holding the left keyboard tab in place, and lift it to release.
- One Torx T6 fine thread screw.

Step 8

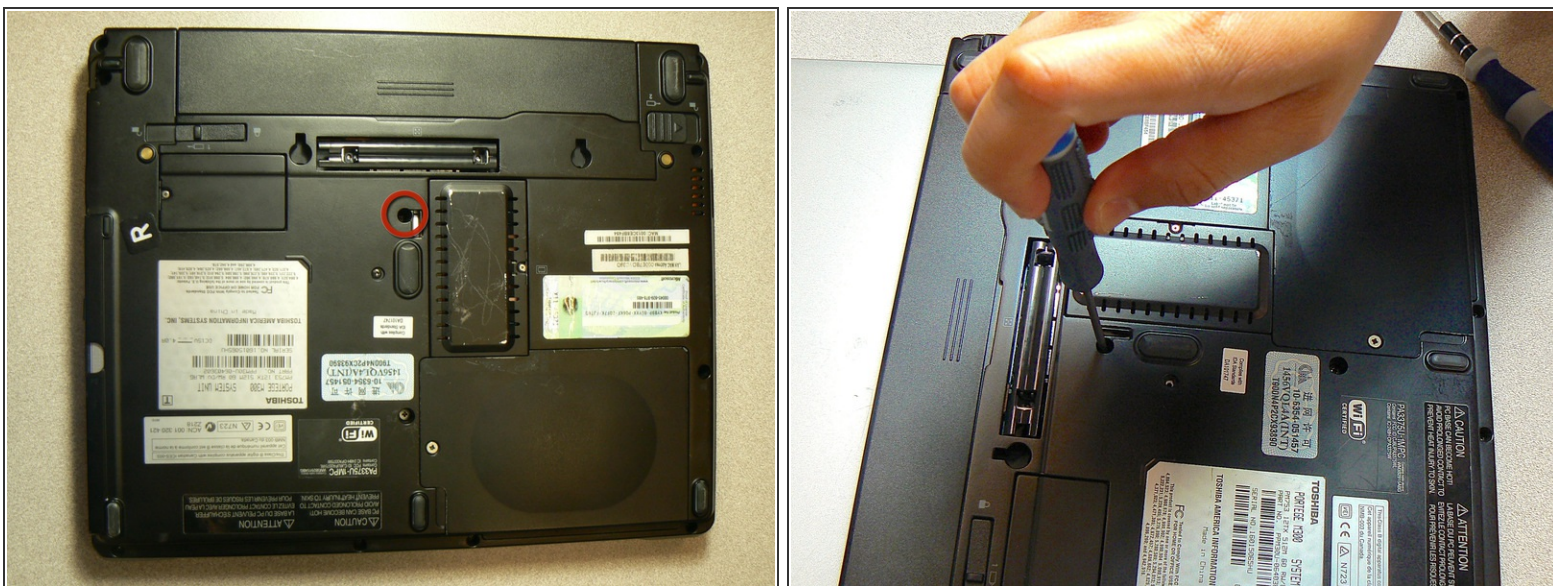



- Turn the computer over on to the back.
- Remove the middle screw with a Phillips head #000 screwdriver.
- One 7.5 mm fine thread screw.

Step 9

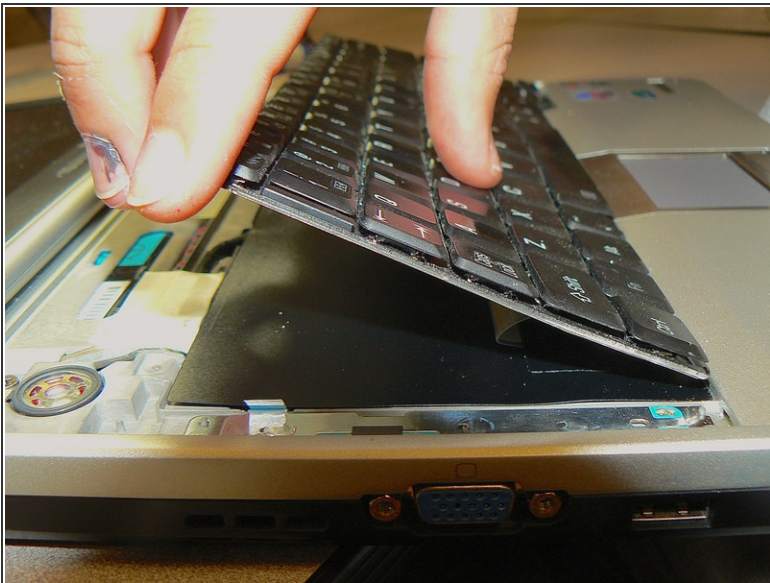

- Turn the computer over to the front.
- Gently pull at the top and bottom to remove the keyboard.
- Peel off the black tape that holds the connection wire.

Step 10

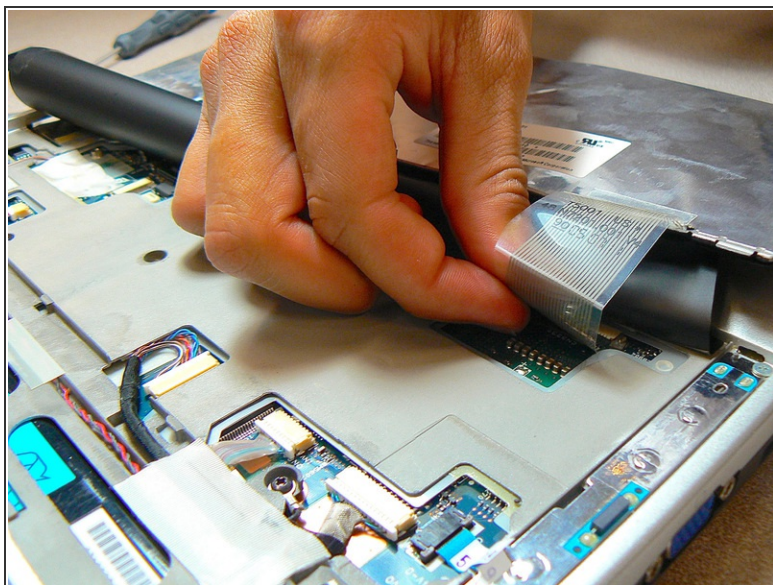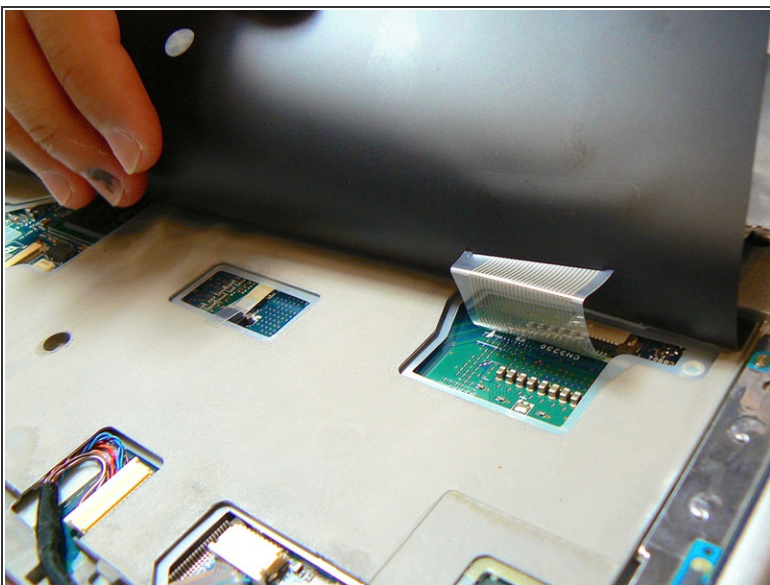

- Flip the keyboard over and carefully unplug the connection wire.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-28 04:14:11 PM.